


## ITALFIRE S50

### Pressioni Pressures:

Pressione a/Pressure to -20°C .....	1,30 MPa
Pressione a/Pressure to +20°C .....	1,40 MPa
Pressione a/Pressure to +60°C .....	1,60 MPa

### Dimensione estintore pronto all'uso:

<b>Dimensions of fire extinguisher:</b>	
Verticale/Vertical .....	1100 mm
Orizzontale/Orizantal .....	580 mm
Volume totale involucro/Total vessel's quantity .....	59,5 lt
Peso estintore pronto all'uso/Weight of fire extinguisher .....	83 kg

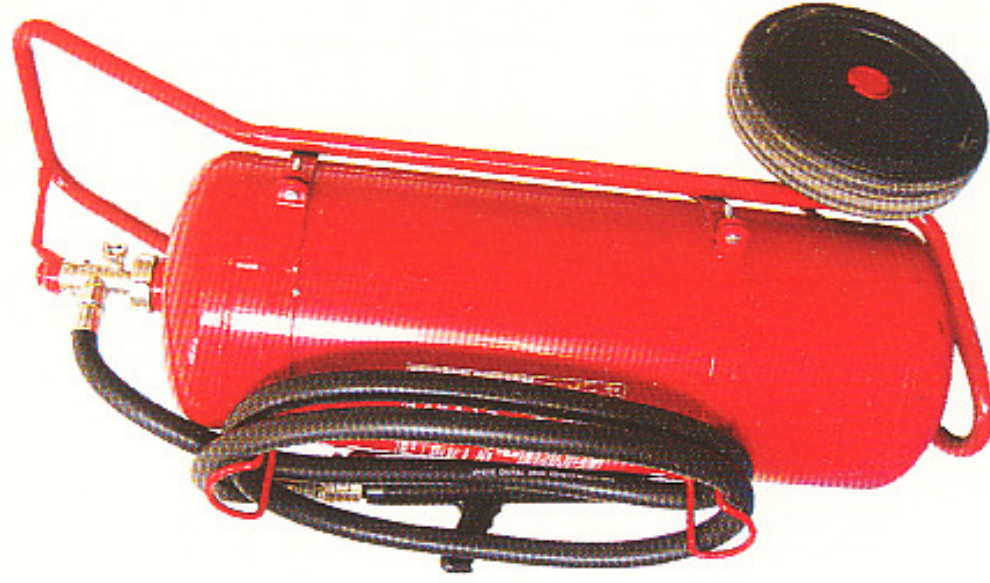

Approvazione Ministeriale/Ministerial Approval .....	2640/153 C sott. 126 del 06/03/2008
Classe di fuoco/Fire rate .....	A-B4
Denominazione commerciale/Commercial denomination .....	ITALFIRE S50
Carica nominale ed estinguente/Extinguish nominal value .....	Lt.50 Schiumogeno/foam extinguisher AFFF
Propellente/Propellent .....	Azoto/Azote
Temperatura di utilizzo/Maximum operating temperature .....	-20°C +60°C